





Universal Remote

RM4C mini

web: www.mybestcon.com
e-mail: support@mybestcon.com

■ Overview

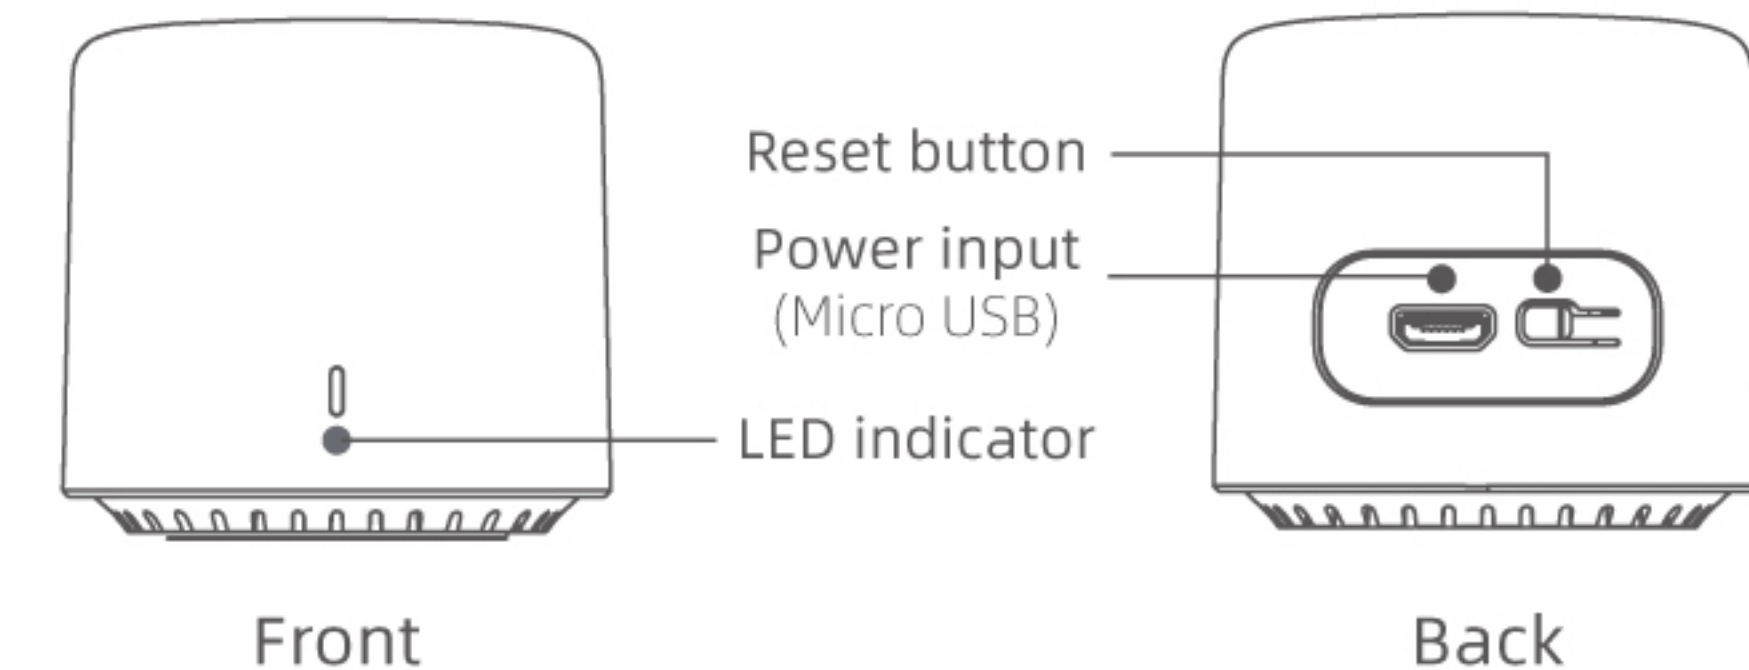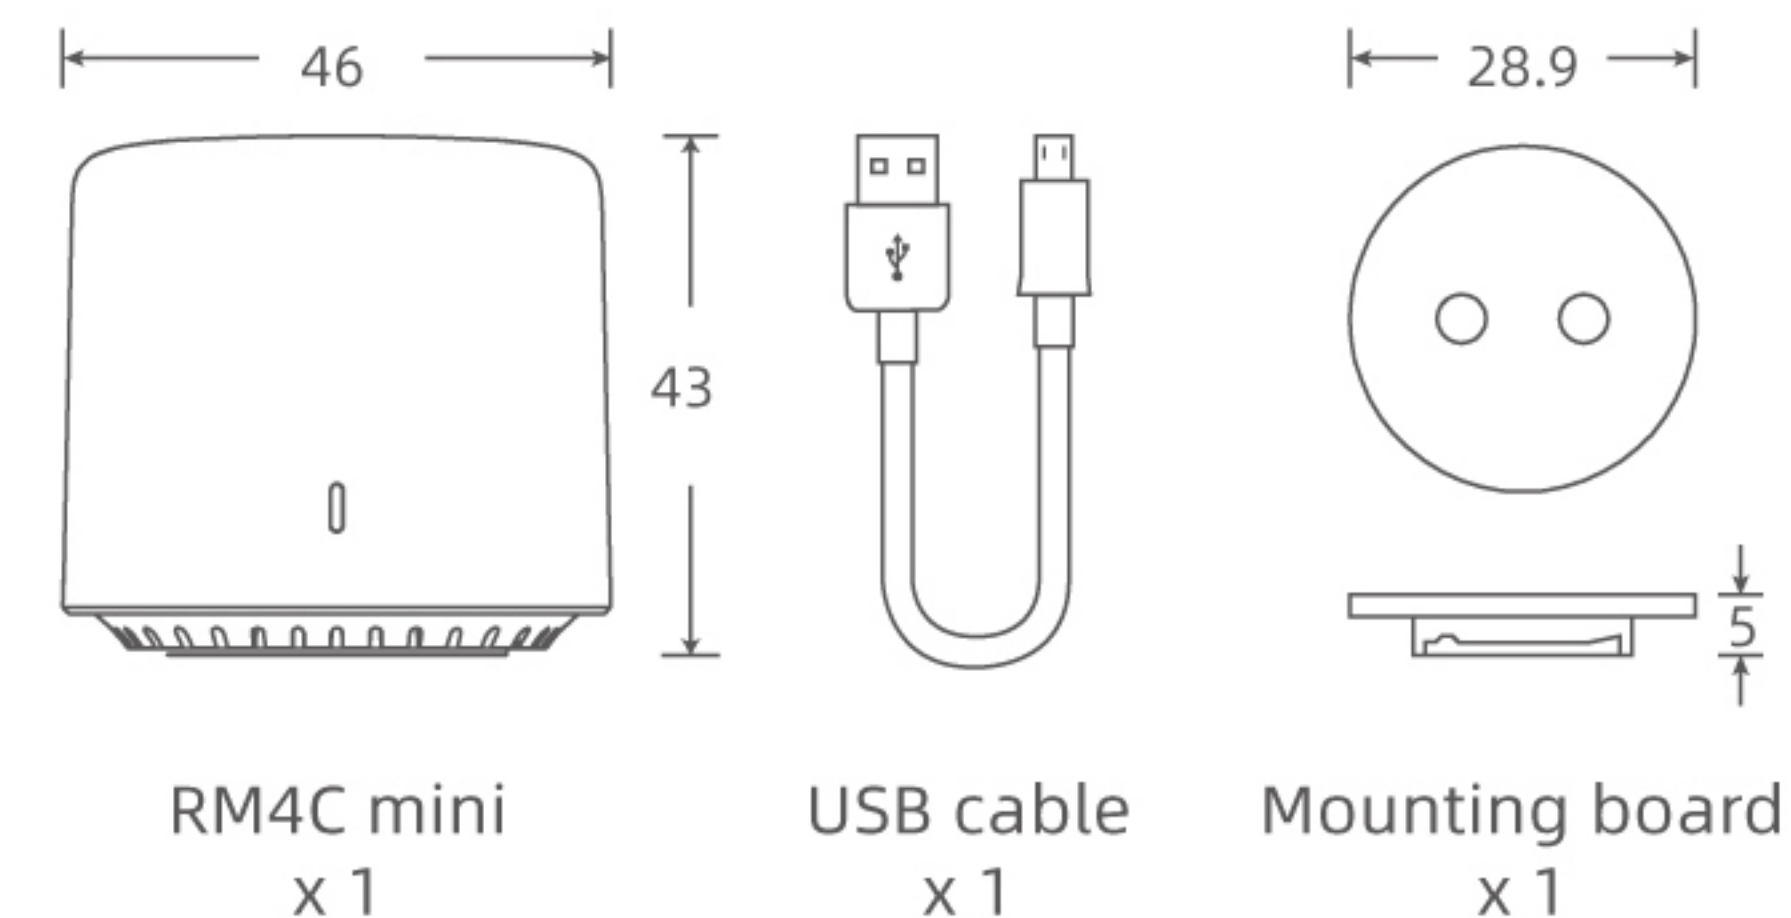

■ Indications

Status	Indication
Flashes quickly (5 times/sec)	Device is in Smart Setup mode (waiting to be added).
Flashes intermittently	Device is in AP Setup mode (waiting to be added)
Flashes slowly then off	Device is being set up and added to network
Flashes slowly continuously	Device is failed to connect to network or disconnected from network
Flash once	IR signal is sent

• Reset for AP Setup

When the device is in any conditions, press and hold the reset button for 5s until the LED flashes intermittently. DO NOT hold longer than 10s, otherwise it will go to Smart Setup mode.

• Reset for Smart Setup

When the device is in any conditions, press and hold the reset button for 10s until the LED flashes quickly.

■ Troubleshooting

1. I can't add the device in APP, I don't know what is the problem?
Make sure your Wi-Fi network is 2.4GHz and password contains no more than 32 non-special characters. Make sure there are not too many devices in network (no more than 15 normally including Phones. Pads, Laptops...).
2. I can't find the device in Alexa and Google Home App. How can I do?
 - Alexa and Google Home will recognize sub-devices (IR devices) not universal remote itself.
 - Make sure the IR devices can be controlled from external networks in BroadLink App before discovering in Alexa and Google Home.

■ Important notices

- Please choose the proper adapter which output power is 5V DC 1A.
- For indoor use in dry environment only.
- Keep clear space with the device.