

DESCRIPTION



- Collector-Emitter Breakdown Voltage-
: $V_{(BR)CEO} = 180V(\text{Min})$
- Good Linearity of h_{FE}
- Complement to Type 2SA1516

APPLICATIONS

- Power amplifier applications
- Recommend for 80W high fidelity audio frequency amplifier output stage applications

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	180	V
V_{CEO}	Collector-Emitter Voltage	180	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current-Continuous	12	A
I_B	Base Current-Continuous	1.2	A
P_C	Collector Power Dissipation @ $T_c=25^\circ\text{C}$	130	W
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-55~150	$^\circ\text{C}$

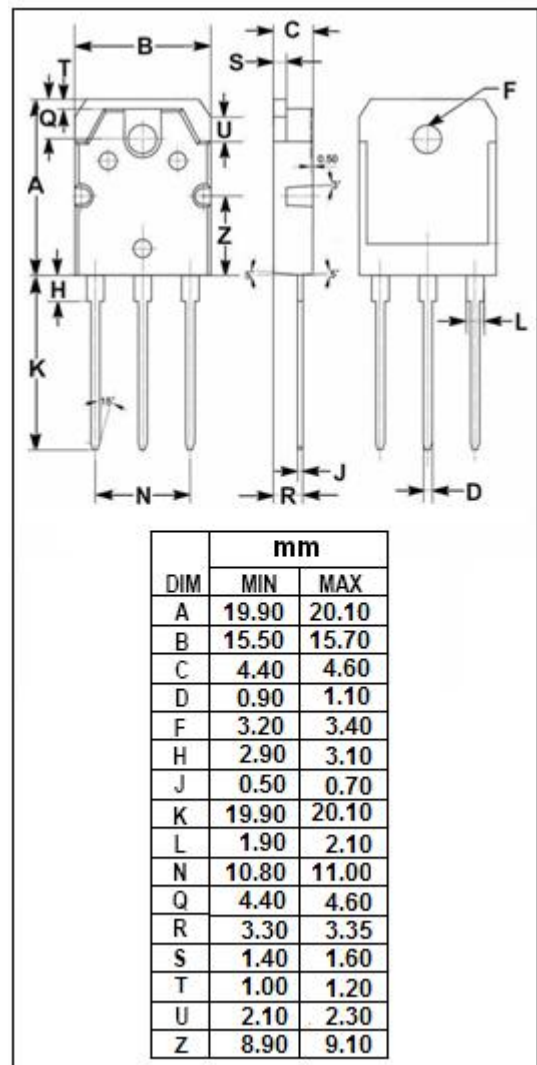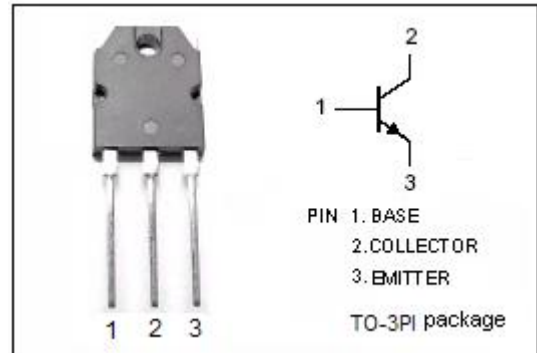

ELECTRICAL CHARACTERISTICS

$T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C= 50\text{mA}; I_B= 0$	180			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C= 8\text{A}; I_B= 0.8\text{A}$			2.0	V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C= 7\text{A}; V_{CE}= 5\text{V}$			1.5	V
I_{CBO}	Collector Cutoff Current	$V_{CB}= 180\text{V}; I_E= 0$			5	μA
I_{EBO}	Emitter Cutoff Current	$V_{EB}= 5\text{V}; I_C= 0$			5	μA
h_{FE-1}	DC Current Gain	$I_C= 1\text{A}; V_{CE}= 5\text{V}$	55		180	
h_{FE-2}	DC Current Gain	$I_C= 7\text{A}; V_{CE}= 5\text{V}$	35			
C_{OB}	Output Capacitance	$I_E=0; V_{CB}= 10\text{V}; f_{test}= 1.0\text{MHz}$		270		pF
f_T	Current-Gain—Bandwidth Product	$I_C= 1\text{A}; V_{CE}= 5\text{V}$		30		MHz

◆ **h_{FE-1} Classifications**

R	O
55-110	90-180