


Sub-miniature Snap Action Switch - DM1 Series



RoHS
Compliant

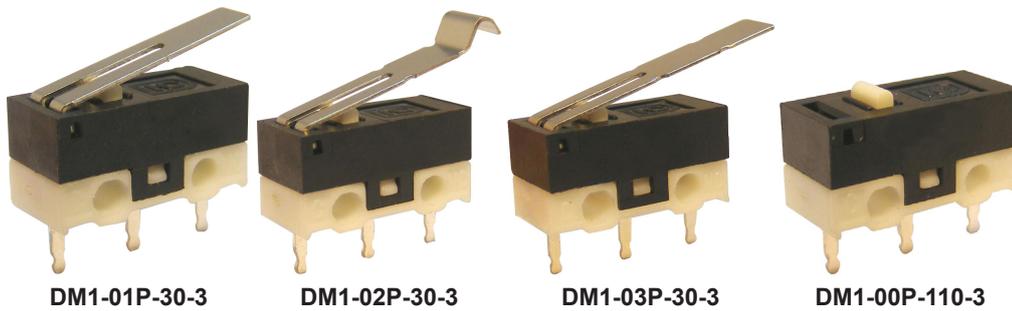


Specifications

Switch Type	: Sub-Miniature Snap-Action
Switch Actuator	: Button / Short Lever / Hook Lever / Long Lever
Contact Configuration	: SPDT
Switch Terminal	: Straight PC Terminal
Button	: White


Electrical Specifications

Rating	: 1A, 125V AC / 30mA, 5V DC
Contact Resistance	: 100mΩ initial (max.)
Insulation Resistance	: 100MΩ (min.) @ 500V DC
Withstand Voltage	: 500V AC/1 minute
Loaded Life Cycle	: 10,000 (500,000 - 5V DC, 30mA)
Mechanical Operating Frequency	: 120/min.
Electrical Operating Frequency	: 10/min.


For PCB Terminal

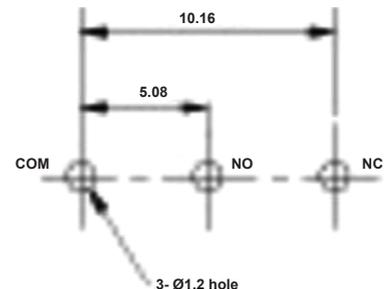

Diagrams

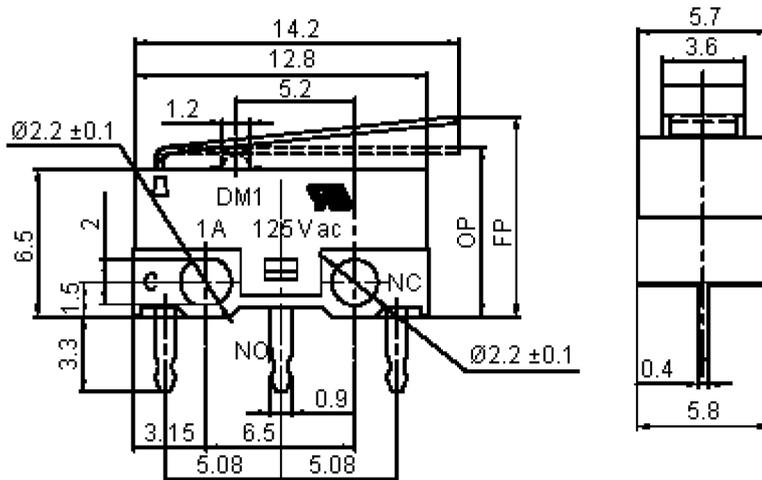


DM1-01P-30-3




Dimensions : Millimetres




Sub-miniature Snap Action Switch - DM1 Series

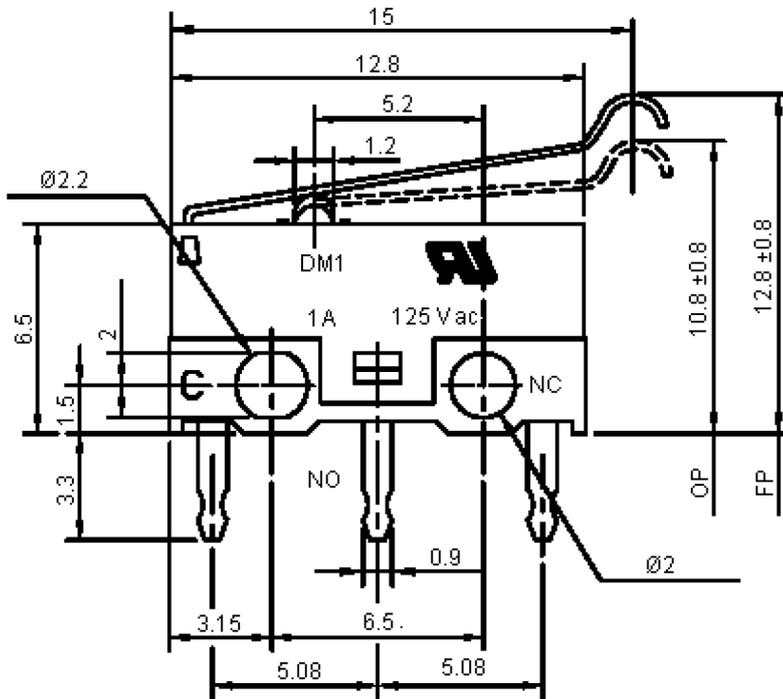


DM1-02P-30-3



Schematic

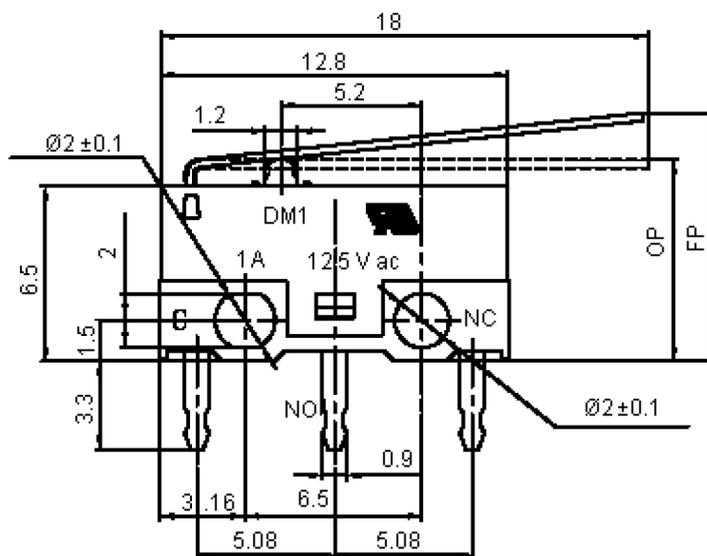

DM1-03P-30-3



Schematic

Dimensions : Millimetres



