


D2LS

Ultra Subminiature Basic Switch

Compact Surface-mounting Switches ideal for applications requiring long durability High force type with long durability also available.

- High operating force type also achieving long durability (OF = 1.2 N, Durability: 10,000,000 operations. OF = 0.6 N, Durability: 20,000,000 operations.)
- Compact size 8.6 × 4.8 × 3.0 mm (W × D × H) contributing to down-sizing of module
- Clear click feeling
- Embossed taping package for automatic mounting

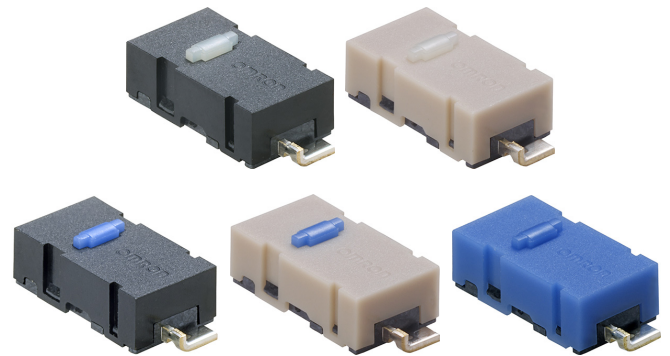

Model Number Legend

D2LS-□□
(1) (2)

- (1) Operating Force (OF) (2) External shape
- | | |
|--------------------------|-----------------|
| 1: 1.2±0.4 N {122±41 gf} | 1: With boss |
| 2: 0.6±0.2 N {61±20 gf} | 0: Without boss |

Contact Form

- SPST-NO



List of Models

Operating Force (OF)	Durability, Mechanical/Electrical	With/Without boss	Button color	Cover color	Model	Minimum packing unit *
1.2 N {122 gf}	5,000,000 operations min.	With boss	WHITE	BLACK	D2LS-11	2,000 pcs.
		Without boss		GRAY	D2LS-10	
	10,000,000 operations min.	Without boss		GRAY	D2LS-11 (10M)	
0.6 N {61 gf}	5,000,000 operations min.	With boss	BLUE	BLACK	D2LS-21	
		Without boss		GRAY	D2LS-21 (10M)	
	10,000,000 operations min.	Without boss		BLUE	D2LS-21 (20M)	
	20,000,000 operations min.	With boss				

* Products are packed with embossed tape.

Contact Specifications

Contact	Specification	Crossbar
	Material	Silver
	Gap (standard value)	0.4 mm
Minimum applicable load (reference value)		5 VDC 1 mA

Ratings

Rated voltage	Resistive load
6 VDC	1 mA

Note: The rating values apply under the following test conditions.
 Ambient temperature: 20 ± 2°C
 Ambient humidity: 65 ± 5%RH
 Operating frequency: 300 operations/1 min.

Characteristics

		D2LS-10 D2LS-11 D2LS-21	D2LS-11 (10M) D2LS-21 (10M)	D2LS-21 (20M)
Operating speed		1 mm to 500 mm/s		
Operating frequency	Mechanical/Electrical	300 operations/1 min. max.		
Insulation resistance		100 MΩ min. (at 500 VDC)		
Contact resistance (initial value)		100 mΩ max.		
Dielectric strength	Between terminals of same polarity	600 VAC 50/60 Hz 1 min		
Vibration resistance *1	Malfunction	10 to 55 Hz, 1.5 mm double amplitude		
Shock resistance *1	Destruction	1,000 m/s ² max.		
	Malfunction	300 m/s ² max.		
Durability *2	Mechanical/Electrical	5,000,000 operations min. (at 300 ops./1 min.)	10,000,000 operations min. (at 300 ops./1 min.)	20,000,000 operations min. (at 300 ops./1 min.)
Degree of protection		IP40		
Ambient operating temperature		-25 to +85°C (at 60%RH Max.) (with no icing or condensation)		
Ambient operation humidity		85%RH max. (for +5 to +35°C)		
Weight		Approx. 0.16 g		



Note: The data given above are initial values.

*1. The values are at Free Position and Total Travel Position values.
Close or open circuit of the contact is 1ms max.


*2. For testing conditions, consult your OMRON sales representative.

Dimensions (Unit: mm) / Operating Characteristics


- D2LS-10
- D2LS-11
- D2LS-11 (10M)
- D2LS-21
- D2LS-21 (10M)
- D2LS-21 (20M)

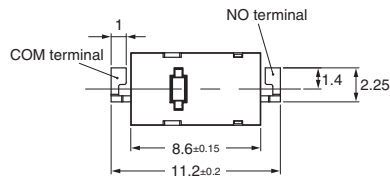


With boss D2LS-□1

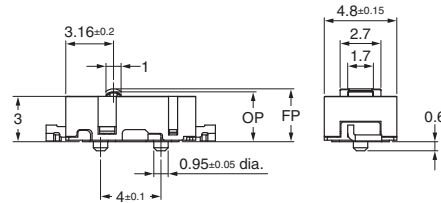


Without boss D2LS-□0

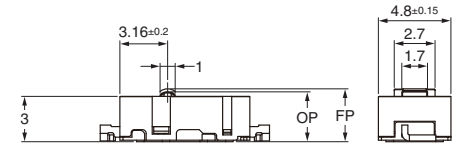

PCB pad dimensions (reference)
(TOP VIEW)




PCB pad dimensions (reference)
(TOP VIEW)



Model		D2LS-10 D2LS-11 D2LS-11 (10M)	D2LS-21 D2LS-21 (10M) D2LS-21 (20M)
Operating Force	OF	1.2 ± 0.4 N {122 ± 41 gf}	0.6 ± 0.2 N {61 ± 20 gf}
Releasing Force	RF min.	0.15 N {15 gf}	0.15 N {15 gf}
Overtravel	OT min.	0.1 mm	
Movement Differential	MD max.	0.12 mm	
Operating Position	OP	3.2 ± 0.2 mm	
Free Position	FP	3.5 ± 0.2 mm	

Note: Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.

Packaging Specifications (Unit: mm)

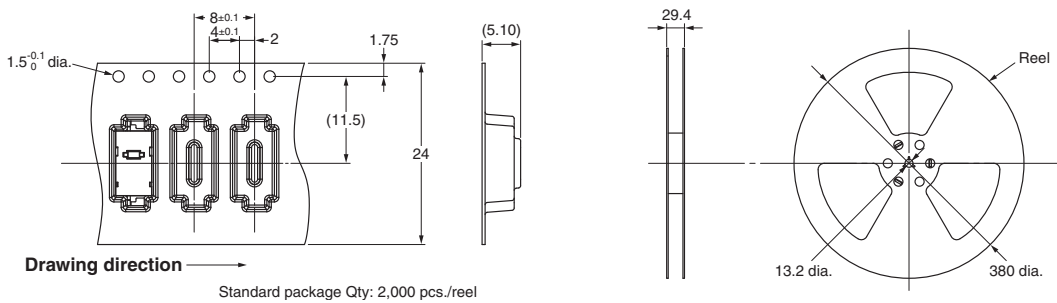

Precautions

★ Refer to General Information.

Cautions

Use the Switch within the rated voltage and current ranges, otherwise the Switch may have a shortened durability, radiate heat, or burn out. This particularly applies to the instantaneous voltages and currents when switching.

Correct Use

● Soldering

● General Precautions


Before soldering the Switch on a multilayer PCB, test to confirm that soldering can be performed properly. Otherwise the Switch may be deformed by the soldering heat on the pattern or lands of the multilayer PCB.

Do not solder the Switch more than twice, including rectification soldering. An interval of five minutes is required between the first and the second soldering.

● Reflow Soldering (Surface Mounting)

Solder the terminals within the heating curve shown in the following diagram.

The peak temperature may vary depending on the reflow bath used. Confirm the conditions beforehand.

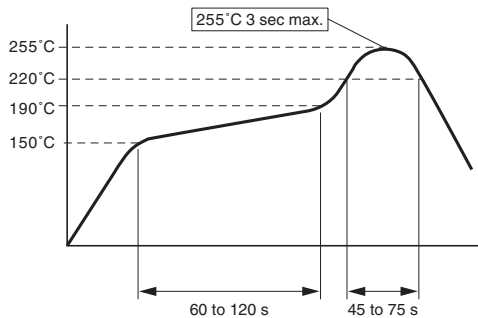

● Manual Soldering

Soldering temperature: 350°C max. at the tip of the soldering iron

Soldering time: 3 s max.

● Washing

The Switch is not sealed, and cannot be washed. Doing so will cause the washing agent, together with flux or dust particles on the PCB, to enter the Switch, resulting in malfunction.

● Application Environment

Do not use the Switch in locations that are subject to toxic gas, silicon, excessive dust, excessive dirt, high temperatures, high humidity, sudden temperature changes, water splashes, or oil splashes.

Otherwise, damage resulting by faulty contact of the Switch contacts, corrosion, or other causes, or other functional faults may occur.

Please check each region's Terms & Conditions by region website.

OMRON Corporation

Device & Module Solutions Company

Regional Contact

Americas

<https://components.omron.com/us>

Asia-Pacific

<https://components.omron.com/ap>

Korea

<https://components.omron.com/kr>

Europe

<https://components.omron.com/eu>

China

<https://components.omron.com.cn>

Japan

<https://components.omron.com/jp>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

[D2LS-10](#) [D2LS-11\(10M\)](#) [D2LS-21\(10M\)](#) [D2LS-21\(20M\)](#)